

# **BURCHLAND** **AGT** SKID STEER TRIMMER AUTO GRADING TRIMMER



**TRIM, GRADE AND ROLL ALL IN ONE PASS**  
**[www.Burchlandmfg.com](http://www.Burchlandmfg.com)**



# BURCHLAND **AGT** AUTO GRADING TRIMMER Standard Features

Finish grade vs rough grade



38.26 Cubic inch displacement,  
direct drive hydraulic motor



16" diameter, 1/2" steel flighted,  
Integrated replaceable carbide  
cutting teeth



16" diameter rolling drum helps support some  
weight of the skid steer for a smooth ride and  
provides a smooth final grade finish



Mid mounted grader blade that rides  
between the trimmer and the rolling drum



- GPS and Robotic Total Station capable, eliminating the constraints of stringlining
- 96" cut path
- Functions in automatic or manual mode.
- Sub-centimeter cut tolerance.
- Pressure gauge visible from the cab allows the operator to adjust ground speed to varying soil conditions.






\* High flow auxiliary hydraulics are recommended.

\* A 5 degree cut angle helps to windrow material and provide a smooth finish.

\* Two Hydraulic cylinders raise and lower the trimmer head to exactly match the designed finish grade elevation.

\* Three hydraulic connections are required on the skid steer. Pressure, return and a separate case drain line for the hydraulic motor. Consult your skid steer dealer for a plumbing kit to install a case drain line if your skid steer is not already equipped with one.

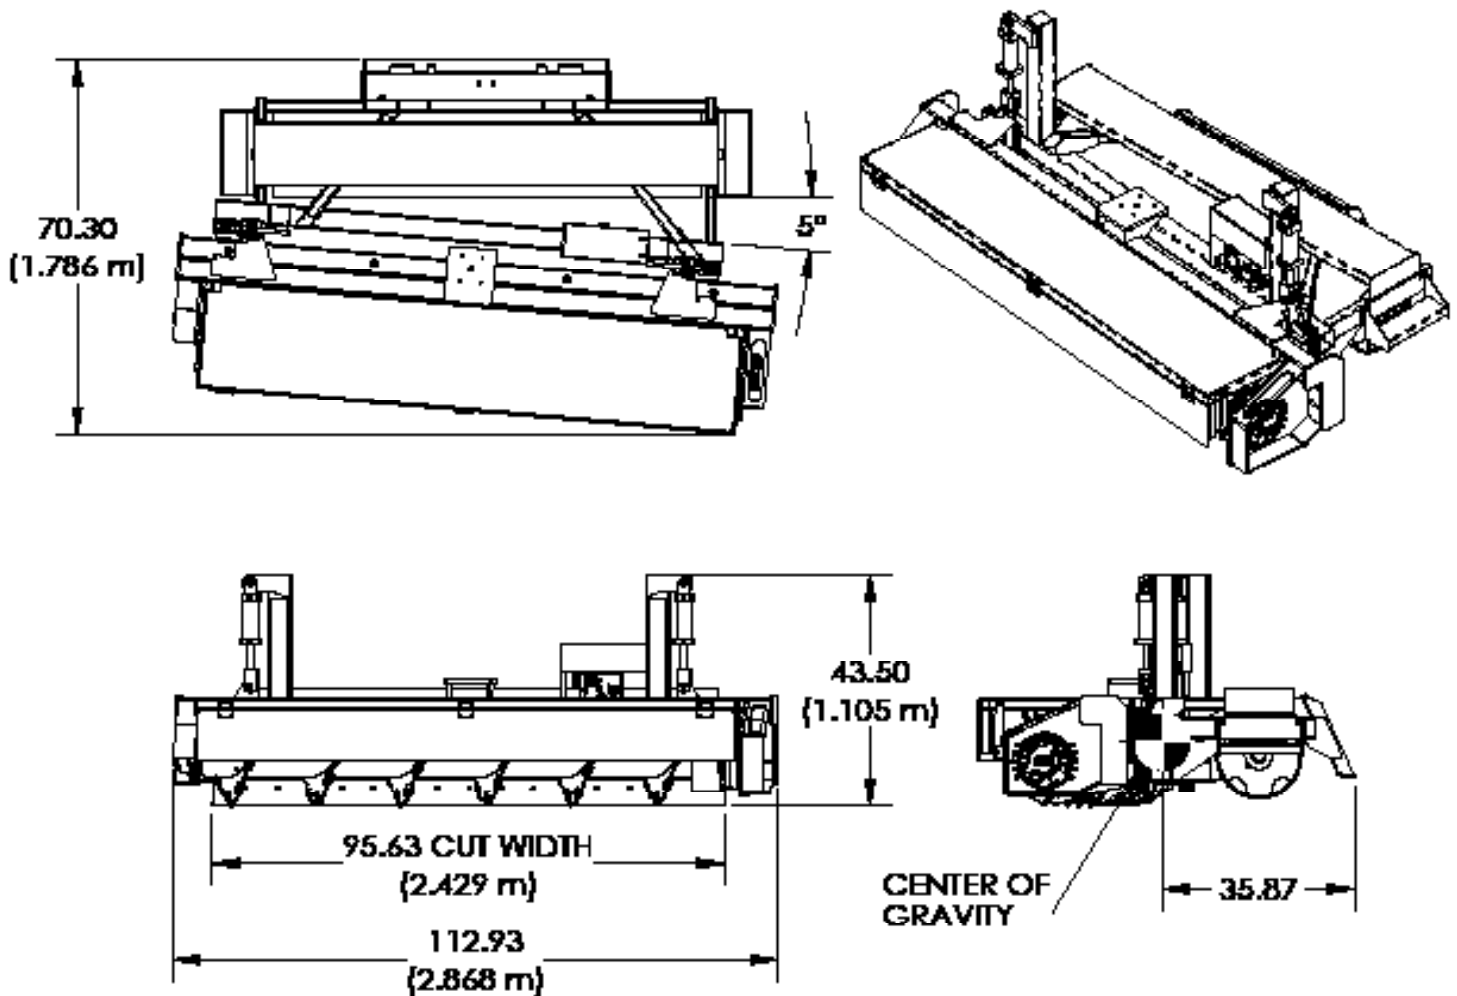

- Weight: 2,850 pounds

- Rotor speed of 210 RPM @ 35 GPM Hydraulic flow

**BURCHLAND**

3311 Yates Avenue  
Gilman, IA 50106  
641-498-2063  
[www.Burchlandmfg.com](http://www.Burchlandmfg.com)

